

HQ:CSC17/Cr-Au BS

Gold Coated Contact Mode AFM Probe


AFM probes of the HQ:CSC17 series have AFM cantilevers with low force constants that offer high sensitivity in contact mode AFM. These AFM probes are also used for Lateral Force Microscopy.

The HQ AFM probes offer high consistency of the AFM tip radius, the AFM cantilever reflectivity and the quality factor.

The gold reflective coating enhances the laser reflectivity of the AFM cantilever in air and liquids.

Coating

Reflective Gold

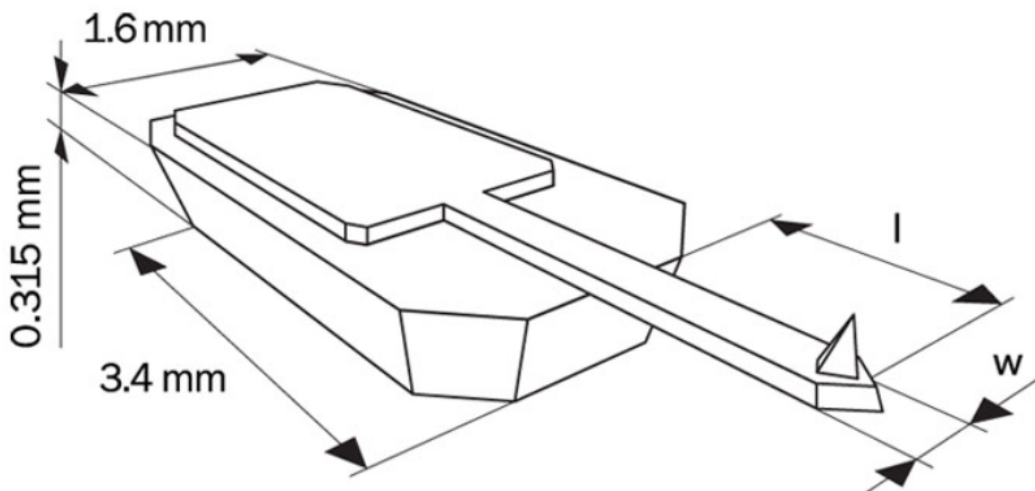

AFM Probe Specifications

AFM Tip

SHAPE	HEIGHT	FULL CONE ANGLE	RADIUS
Rotated	15 μm (12 – 18 μm)*	40°	< 8 nm

AFM Cantilever

CANTILEVER	SHAPE	FORCE CONST.	RES. FREQ.	LENGTH	WIDTH	THICKNESS
Cantilever A	Beam	0.18 N/m (0.06 – 0.4 N/m)*	13 kHz (10 – 17 kHz)*	450 μm (1 – 455 μm)*	50 μm (47 – 53 μm)*	2 μm (1.5 – 2.5 μm)*

* typical values