

# HQ:CSC38/AI BS

## AFM Probe with 3 Different Contact Mode AFM Cantilevers


AFM probes of the HQ:CSC38 series have three different soft contact mode AFM cantilevers on one side of the holder chip. They can be used in various applications.

The HQ AFM probes offer high consistency of the AFM tip radius, the AFM cantilever reflectivity and the quality factor.

The aluminum reflective coating enhances the laser reflectivity of the AFM cantilevers by approximately 2.5 times. For operation in liquids we recommend using the HQ:NSC36/Cr-Au BS with a reflective gold coating.

### Coating

Reflective Aluminum

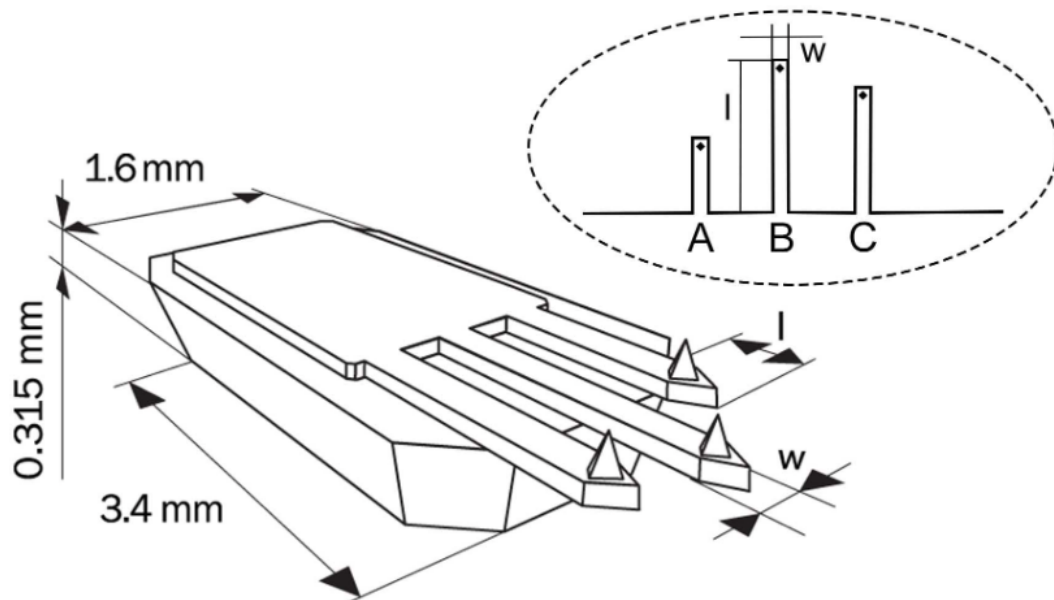

## AFM Probe Specifications

### AFM Tip

SHAPE	HEIGHT	FULL CONE ANGLE	RADIUS
Rotated	15 $\mu\text{m}$ (12 – 18 $\mu\text{m}$ )*	40°	< 8 nm

### AFM Cantilever

CANTILEVER	SHAPE	FORCE CONST.	RES. FREQ.	LENGTH	WIDTH	THICKNESS
Cantilever A	Beam	0.09 N/m (0.01 – 0.36 N/m)*	20 kHz (8 – 32 kHz)*	250 $\mu\text{m}$ (1 – 255 $\mu\text{m}$ )*	32.5 $\mu\text{m}$ (29.5 – 35.5 $\mu\text{m}$ )*	1 $\mu\text{m}$ (0.5 – 1.5 $\mu\text{m}$ )*
Cantilever B	Beam	0.03 N/m (0.003 – 0.13 N/m)*	10 kHz (5 – 17 kHz)*	350 $\mu\text{m}$ (1 – 355 $\mu\text{m}$ )*	32.5 $\mu\text{m}$ (29.5 – 35.5 $\mu\text{m}$ )*	1 $\mu\text{m}$ (0.5 – 1.5 $\mu\text{m}$ )*
Cantilever C	Beam	0.05 N/m (0.005 – 0.21 N/m)*	14 kHz (6 – 23 kHz)*	300 $\mu\text{m}$ (1 – 305 $\mu\text{m}$ )*	32.5 $\mu\text{m}$ (29.5 – 35.5 $\mu\text{m}$ )*	1 $\mu\text{m}$ (0.5 – 1.5 $\mu\text{m}$ )*

\* typical values