


NITRA-TALL-V

The following features make these probes unique for biological applications:

- Extra Tall Tip With High Aspect Ratio : Reduced artifacts when imaging tall biological features
- Integrated Laser Reflecting Pad : For optional gold reflex coating.
- Reduced Thermal Drift : Uncoated probes are not affected with thermal drift (bimorph effect) when imaging in liquid. This facilitates instant imaging without waiting to stabilize the probe in the solution.
- Chemical Functionalization: The silicon nitride material on the tips can be conveniently functionalized

Tip Specifications

- **Coating:** None
- **Material:** Silicon Nitride
- **Shape:** Tetrahedral
- **Height (μm):** 14-16
- **ROC (nm) :** <30

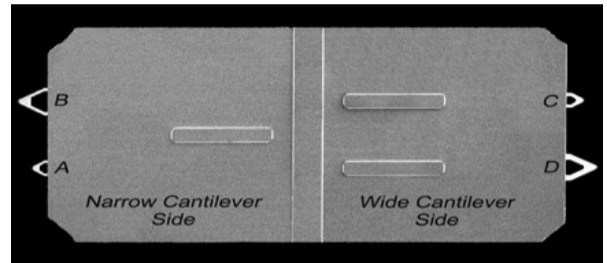

Cantilever Specifications

Material: Silicon Nitride
 Shape :V-Shape
 Reflex coating :None

Parameter	Nominal	Min	Max	Cantilever
f (kHz)	10.0	8.0	11.0	B
Width (μm)	35.0	30.0	40.0	B
Length (μm)	230.0	220.0	240.0	B
k (N/m)	0.029	0.017	0.048	B
Thickness (μm)	0.55	0.50	0.60	B
f (kHz)	37.0	27.0	51.0	A
Width (μm)	15.0	13.0	17.0	A
Length (μm)	105.0	95.0	115.0	A
k (N/m)	0.162	0.080	0.321	A
Thickness (μm)	0.55	0.50	0.60	B
f (kHz)	41.0	30.0	55.0	C
Width (μm)	22.0	20.0	24.0	C
Length (μm)	105.0	95.0	115.0	C
k (N/m)	0.237	0.123	0.453	C
Thickness (μm)	0.55	0.50	0.60	C
f (kHz)	13.0	12.0	16.0	D
Width (μm)	40.0	38.0	42.0	D
Length (μm)	205.0	195.0	215.0	D
k (N/m)	0.058	0.041	0.092	D
Thickness (μm)	0.55	0.50	0.60	D